



Desktop Printers RT833i



Full Functions 300 DPI Desktop Printer for Getting Job Done So Easy

RT833i with intuitive touchscreen panel, rod-less label roll holder, and innovative calibration button make printing job enjoyable. Elegant design perfects for retail and government applications.



Enlarged touch screen panel for intuitive and easy operation



Multiple interface plus optional WiFi, bluetooth for easy integration



Innovative "C" button makes label Calibration simple and fast

GoDEX

Preliminary Specifications

RT833i

Desktop Printer

Model		RT833i
Print Method		Thermal Transfer / Direct Thermal
Resolution		300 dpi (12 dots/mm)
Print Speed		5 IPS (127 mm/s)**
Print Width		4.16" (105.7 mm)
Print Length		Min. 0.16" (4 mm)** Max. 30" (762 mm)
Processor		32 Bit RISC CPU
Memory	Flash	128 MB Flash
		(60 MB for user storage)
	SDRAM	32 MB
Sensor Type		Adjustable reflective sensor (full range). Fixed transmissive sensor, central aligned
Media	Types	Continuous form, gap labels, black mark sensing, and punched hole; label length set by auto sensing or programming
	Width	Min. 0.79" (20.0 mm) – Max. 4.64" (118 mm)
	Thickness	Min. 0.003" (0.076 mm) – Max. 0.008" (0.20 mm)
	Label Roll Diameter	Max. 5" (127 mm)
Ribbon	Core Diameter	1" (25.4 mm), 1.5" (38.1mm)
	Types	Wax, wax / resin, resin
	Length	984.25' (300 m)
	Width	1.18" Min. - 4.33" (30 mm - 110 mm) Max.
	Ribbon Roll Diameter	2.67" (68 mm)
	Core Diameter	1" (25.4 mm)
Printer Language		EZPL, GEPL, GZPL, GDPL auto switch
Software	Label Design Software	GoLabel (for EZPL only)
	Driver	Vista, Windows 7, Windows 8 & 8.1, Windows 10, Windows Server 2008 R2, 2012, 2012 R2, 2016, 2019, MAC, Linux
	SDK	Win CE, .NET, Windows Vista, Windows 7, Windows 8 & 8.1, Windows 10, Android, Mac, iOS
Resident Fonts	Bitmap Fonts	6, 8, 10, 12, 14, 18, 24, 30, 16X26 and OCR A & B
		Bitmap fonts 90°, 180°, 270° rotatable, single characters 90°, 180°, 270° rotatable
	TTF Fonts	Bitmap fonts 8 times expandable in horizontal and vertical directions
Download Fonts	Asian Fonts	TTF Fonts (Bold / Italic / Underline). 0°,90°, 180°, 270° rotatable
		16x16, 24x24. Traditional Chinese (BIG-5), Simplified Chinese(GB2312), Japanese (S-JIS), Korean (KS-X1001)
	TTF Fonts	90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions
Barcodes	1-D Bar codes	TTF Fonts (Bold / Italic / Underline). 0°,90°, 180°, 270° rotatable
		China Postal Code, Codabar, Code 11, Code 32,Code 39, Code 93, Code 128 (subset A, B, C), EAN-8/EAN-13 (with 2 & 5 digits extension), EAN 128, FIM, German Post Code, GS1 DataBar, HIBC, Industrial 2 of 5 , Interleaved 2-of-5 (1 2 of 5), Interleaved 2-of-5 with Shipping Bearer Bars, ISBT-128, ITF 14, Japanese Postnet, Logmars, MSI, Postnet, Plessey, Planet 11 & 13 digit, RPS 128, Standard 2 of 5, Telepen, Matrix 2 of 5, UPC-A/UPC-E (with 2 or 5 digit extension), UCC/EAN-128 K-Mart and Random Weight
	2-D Bar codes	Aztec code, Code 49,Codablock F , Datamatrix code, MaxiCode, Micro PDF417, Micro QR code, PDF417,QR code, TLC 39, GS1 Composite
Code Pages		CODEPAGE 437, 737,850, 851, 852, 855, 857, 860, 861, 862, 863, 865, 866, 869, WINDOWS 1250, 1251, 1252, 1253, 1254, 1255, 1257
Graphics		Unicode UTF8 、 UTF16BE 、 UTF16LE
Interfaces		Resident graphic file types are BMP and PCX, other graphic formats are downloadable from the software
		Serial port: RS-232 (DB-9)
		USB Device port (B-Type)
		IEEE 802.3 10/100 Base-Tx Ethernet port (RJ-45)
Control Panel		USB Host (A-Type)
		Parallel Port (Mini-Centronics)
		Backlight 3.2" Touch Screen LCD
		Calibration button
Power		Control Key : FEED
		Power on/standby button
Environment	Operation Temperature	Switching power 100-240VAC, 50-60Hz input
	Storage Temperature	41°F to 104°F (5°C to 40°C)
Humidity	Operation	25-85%, non-condensing.
	Storage	10-90%, non-condensing.
Agency Approvals		CE (EMC) 、 FCC Class 、 Energy Star 、 UL 、 BSMI 、 CCC
Dimension	Length	11.0" (280 mm)
	Height	7.7" (195 mm)
	Width	8.3" (210 mm)
Weight		5.9 lbs (2.7 Kg) ,excluding consumables
Options		Label dispenser
		Cutter
		External label unwind Stand
		External label rewinder
		Bluetooth
		Wireless LAN (IEEE 802.11 b/g/n)
		Real Time Clock (RTC)

*Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

**Minimum print height and maximum print speed specification compliance can be dependent on non-standard material variables such as label type,thickness, spacing, liner construction, etc. GoDEX is pleased to test non-standard materials for minimum print height, and maximum print speed capability.

Applications

Applications for Labels & Barcodes

RT833i are the ultimate tool for barcode printings in any industry.



Government

Asset label, filing label, documentation management etc.

Travel & Leisure

Event ticketing, shelf label, product label, transportation ticketing etc.

Retail

Price tags, content labels, jewelry labels, courier tracking label, receipts for registered mails, bills of landing (B / L), postage labels, etc.


GoDEX

LABEL DESIGN SOFTWARE

GoLabel Software / User Friendly

GoLabel is based on a WYSIWYG (what you see is what you get) user interface, makes everything so easy for you to create and print barcode labels. GoLabel is the first-choice label design software that you can't miss it!

Go visit www.godexintl.com and download GoLabel to experience it!

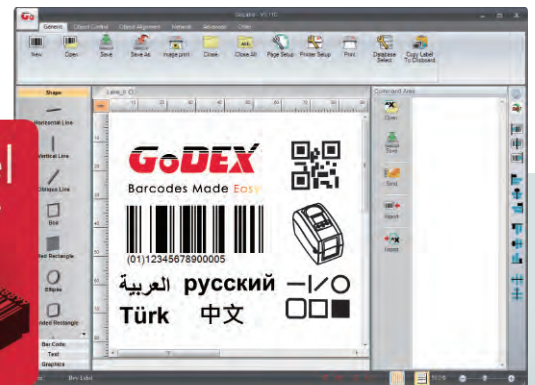


GoDEX

RIBBONS

High quality original GoDEX thermal transfer ribbons

GoDEX offers premium thermal transfer ribbons that will fit most of your printing applications.

- Wax
- Wax/ Resin
- Resin
- Near Edge

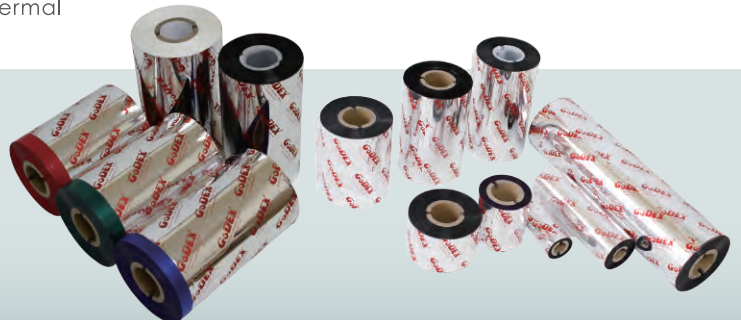

GoDEX
www.godexintl.com

Godex International
(Headquarters)
Telephone : +886 2 2225 8580
Contact us : infoGT@godexintl.com

Godex Americas
Telephone : +1 805 987 5100
Contact us : infoGA@godexintl.com

Godex China
Telephone : +86 21 56651313
Contact us : infoGC@godexintl.com

Godex Europe
Telephone : +49 2195 59599 0
Contact us : infoGE@godexintl.com